

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 5 TOWNSHIP 15 RANGE 5

DATE: 8-6-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Shaft of survey mark nail fd

METHOD OF ESTABLISHMENT: County: 8-19-02



IN. S.P.C. E ZONE NAD '83

NAME: 15050502

N: 503380.0057(m)

E: 71452.8525(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

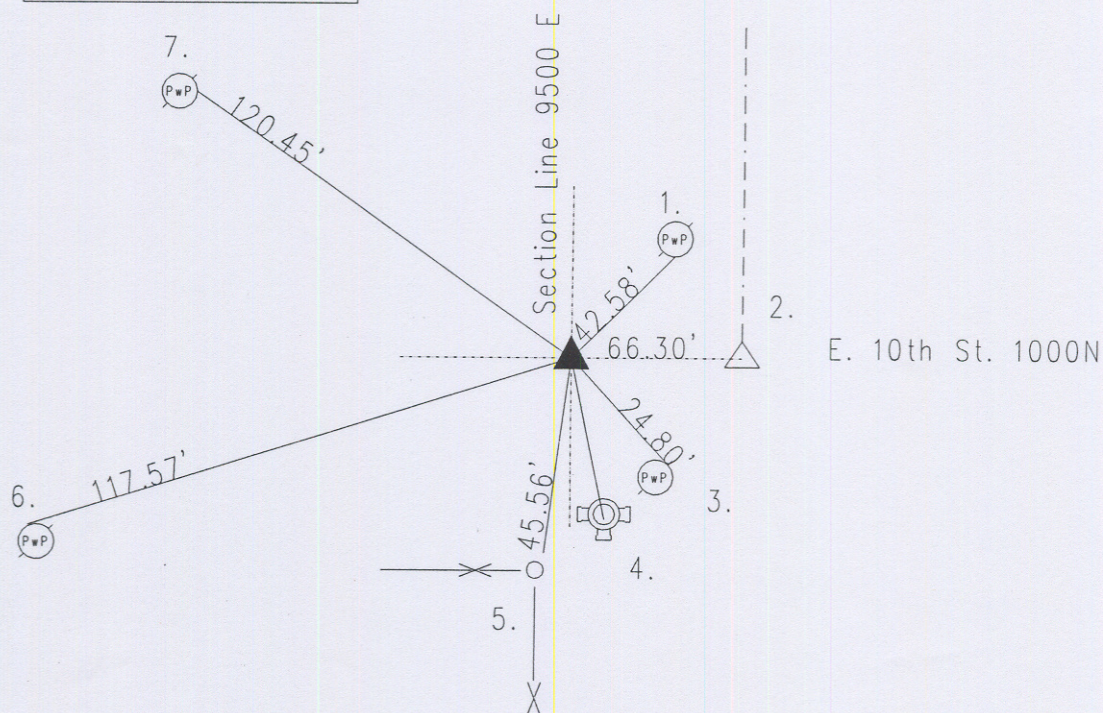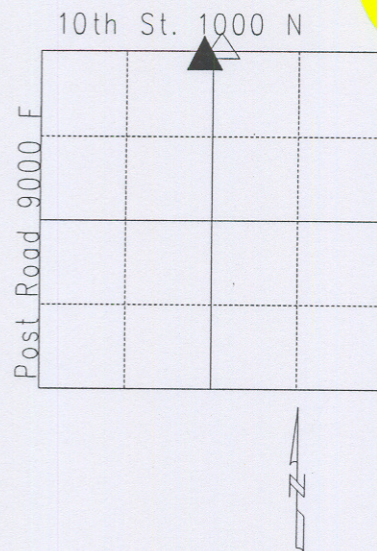

15050502

REF.	DISTANCE	DESCRIPTION
1.	42.58'	PK nail S PwP#46-521A 12"up
2.	66.30'	Due F to S 1/4 32-16-5 (PK nail fd)
3.	24.80'	Mag nail w/be NFPwP#535-521B 12"up
4.	16.74'	Top nut of fire hydrant
5.	45.56'	Center of steel corner fence post for Cemetery
6.	117.57'	Mag nail w/bw N PwP#44-521A 12"up
7.	120.45'	Mag nail w/bw F PwP#184-521A

15050502 N Q

CORNER HISTORY: No reference to the N Q found per Marion County Atlas dated 1820 by John Hendricks along the Range line. Reference dated April 1864 by Voorhies per Warren Township Legal Survey Book pg. 49. Reference dated June 1879 by H. B. Fatout also per page 49. Reference dated 5-23-1850 by Hosbrook per Warren Township Legal Survey Book pg. 13. Reference dated 2- 20&21-1871 by O. W. Voorhies per page 40. Reference dated 8-19-02 by Wilcoxon called survey mark nail and Noted: set corner by George G. Schmidt boundary survey S Q 32-16-5 dated 1922 in Marion County Surveyor's Office 'old' field books. Reference dated 8-6-07 by Wilcoxon called shaft of survey marker nail found showing the distance between double the corners as 66.30'.